




# FORTUNE DUCK INTERCHANGEABLE PRIVACY LEVER HANDLE


## INSTALLATION INSTRUCTIONS (AUSTRALIAN AND NZ PATENT PENDING)

### A

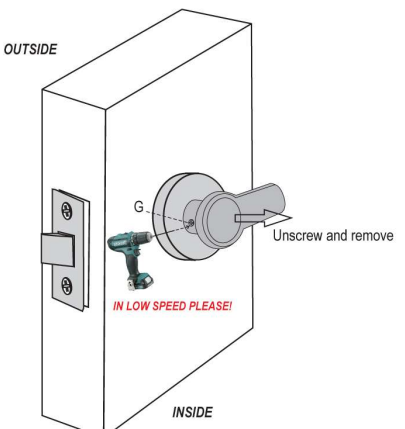


REMOVE THE PLASTIC HANDLES AND COVER RINGS BY UNSCREWING THE SCREWS

### B

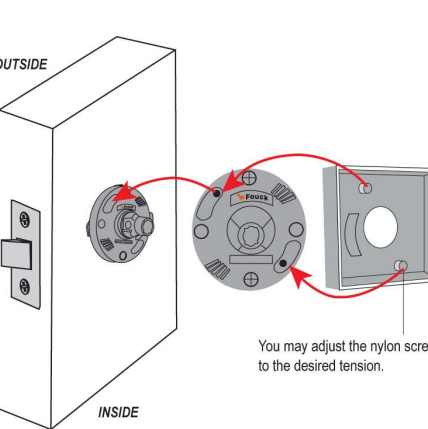


FIT THE COVER RING OVER THE BASE. ENSURE THAT THE NYLON SCREWS GO THROUGH THE CORRESPONDING HOLES (AS SHOWN IN DIAGRAM)

### C

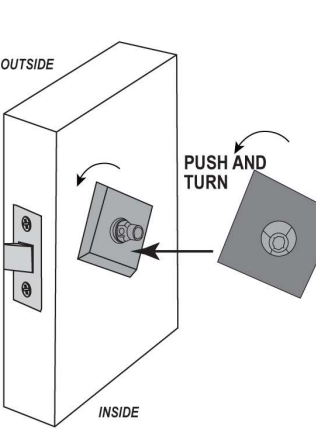


PUSH AND TURN THE COVER RING APPROXIMATELY 20 DEGREES ANTICLOCKWISE TO LOCK IT IN POSITION

### D

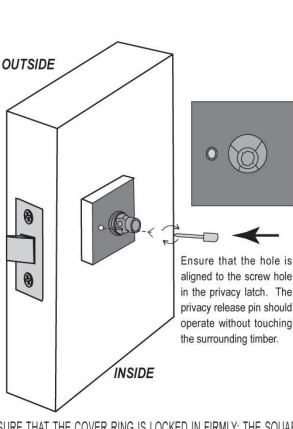


ENSURE THAT THE COVER RING IS LOCKED FIRMLY; THE SQUARE COVER RING SHOULD BE LEVEL. INSERT THE PRIVACY RELEASE PIN THROUGH THE HOLE IN THE COVER RING, SCREW CLOCKWISE INTO THE PRIVACY LATCH.

### E

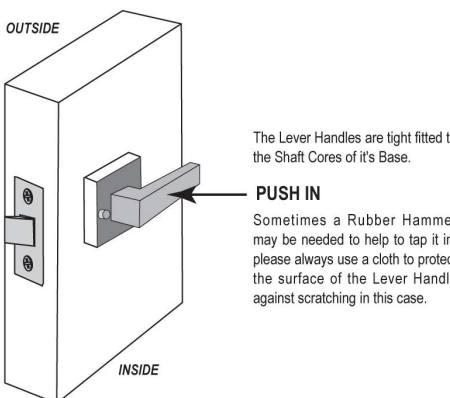

PUSH THE HANDLE INTO PLACE. TO DECREASE THE TOLERANCE OF THE HANDLE, PUSH HANDLE FURTHER AGAINST THE COVER RING.

### F

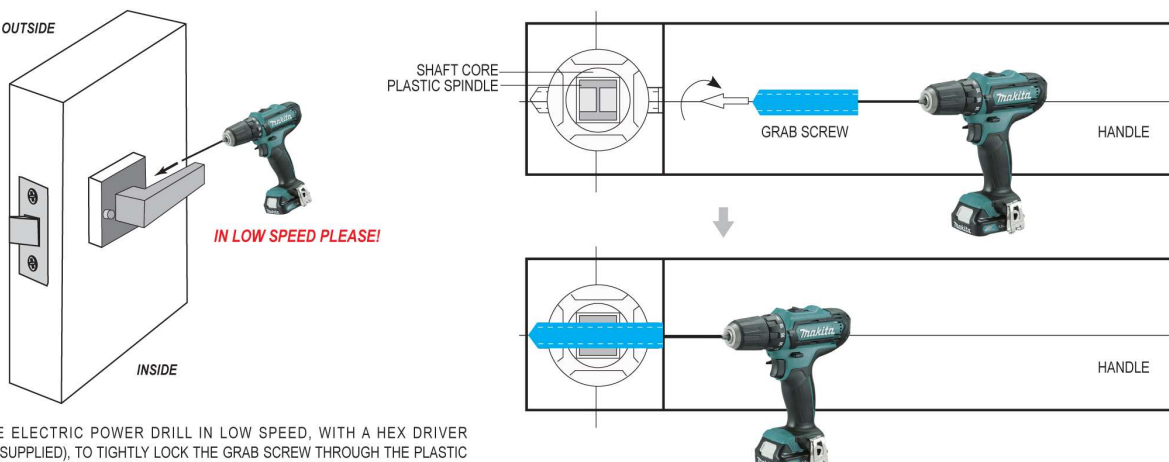

USE ELECTRIC POWER DRILL IN LOW SPEED, WITH A HEX DRIVER BIT(SUPPLIED), TO TIGHTLY LOCK THE GRAB SCREW THROUGH THE PLASTIC SPINDLE TO THE OTHER END OF THE LEVER(AS SHOWN IN DIAGRAM).